

**International Journal of Engineering Research in Electronics and Communication
Engineering (IJERECE)
Vol 4, Issue 3, March 2017**

II. ANTENNA DESIGN

The geometry of the proposed MIMO antenna as shown in figure1 has two planar monopole elements denoted as PM1 and PM2, with a very compact area of only $22 \times 36 \text{ mm}^2$. The size of the radiator must be large enough to allow a long current path to generate a low resonance for achieving a low cut-off frequency of lower than 3.1 GHz for the UWB. Designing the ultra wide band width for an UWB antenna is not such a problem and can be achieved through matching using etching a ground slot under the feed line, adjusting the gap between the ground and the radiator.

Table1. Dimensions of the Antenna (Units:mm)

W	W	W	w	w	w	w	w	d
G1	G2	f1	f2	s	t	d	f	
3	2	2	3	0	1	1	0	5
6	0	.5	.5				.5	
L	L	L	l	l	l	l	l	l
G1	G2	f1	f2	s	t	r	s1	
2	8	4	3	6	7	.3	8	1
2								2
W	--	--	-	-	-	-	-	-
s1	--	--	-	-	-	-	-	-
0	--	--	-	-	-	-	-	-
.55	--	--	-	-	-	-	-	-

From Figure1.(b) Back View, a T-shaped stub is etched at the ground plane between the two monopole elements. The T-shaped ground stub in the MIMO antenna has two functions. One I providing better matching for the antenna and another one is to enhance the isolation by reflecting radiation from the radiators. Mutual coupling between the two input ports is almost below -15db. The ground slot cut on the T-shaped ground stub plays an important role in enhancing isolation. It can be seen that the simulated impedance bandwidths of the antenna with and without the ground slot do not vary much and are from 2.8 GHz to more than 11 GHz. With the use of ground slot, a resonance at about 2.6GHz is generated lowering s_{21} down to below -15dB from 3.1 GHz to more than 11 GHz. The two notched bands are obtained between 5.2-5.95 GHz and 2.6-3.8 GHz which suppressed the interference due to WLAN band and WiMAX bands over the operating UWB frequency range. This is achieved by the use of two pairs of slotsetched on the T-shaped ground stub. They form two open-end slots,

which serves as $\lambda/4$ - resonator at the notch frequency.

The antenna has a symmetrical structure so the two input ports have identical impedance. This makes the design procedure significantly easier because the antenna can be designed with either port excited. The MIMO antenna is designed using EM simulation tool CST on a Rogers R4350 substrate with a dielectric constant ϵ_r of 3.66, a loss tangent of 0.004.

III. SIMULATION RESULTS AND DISCUSSION

The simulated reflection coefficient and mutual coupling s_{11} and s_{12} are shown in Figure2. From the graph of reflection coefficient S_{11} , the proposed antenna has the impedance band width from 2.6 GHz to more than 11 GHz and from the graph of mutual coupling s_{12} is below -15 dB from most of the portion of the impedance bandwidth curve except at the notched bands. This indicates that the antenna is suitable for MIMO operation throughout the FCC UWB frequency range. A notched band is obtained between 5.13 to 5.88GHz to suppress interference with the WLAN band. The notch has a very high value of s_{11} of -1.7dB and at the center frequency, indicating the very effective suppression. The another notched band is obtained from 2.6-3.8 GHz to suppress the interference with WiMAX band. The VSWR plot of the proposed antenna is shown in Figure3. From the graph it is observed that the voltage standing wave ratio (VSWR) of the proposed MIMO UWB antenna is having $VSWR < 2$ except at WiMAX and WLAN bands. The E-plane and H-plane radiation patterns of the proposed antenna are shown at 4.5 GHz and 6.95 GHz frequencies. Also the gain plot, Total efficiency plot and the surface current distribution plot at 6.95 GHz of the proposed antenna are shown in Figure5, Figure6 and Figure7 respectively.

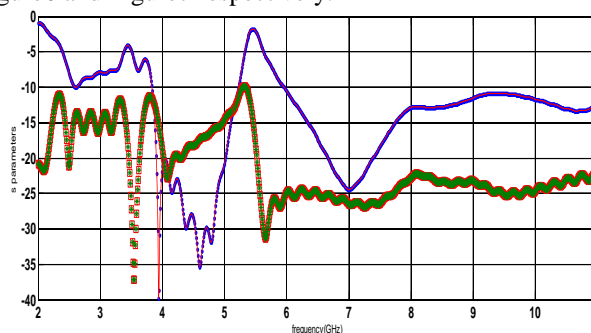


Figure2. Return Loss plot of the Proposed Antenna



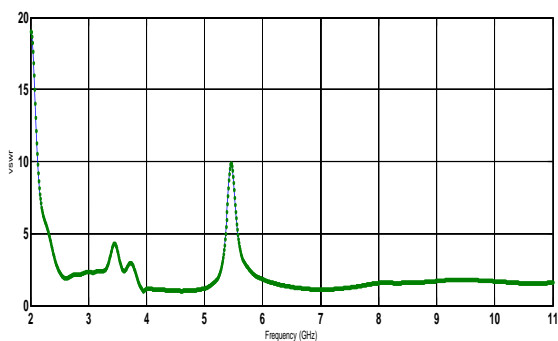



Figure3. VSWR plot of the Proposed Antenna.

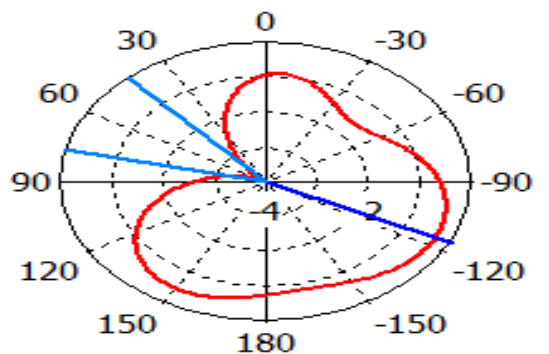


Theta / Degree vs. dB
(a) E- Plane at 4.5 GHz

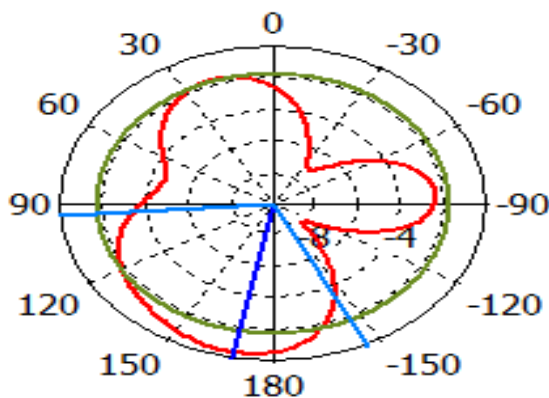

Phi / Degree vs. dB
(b) H- Plane at 4.5 GHz

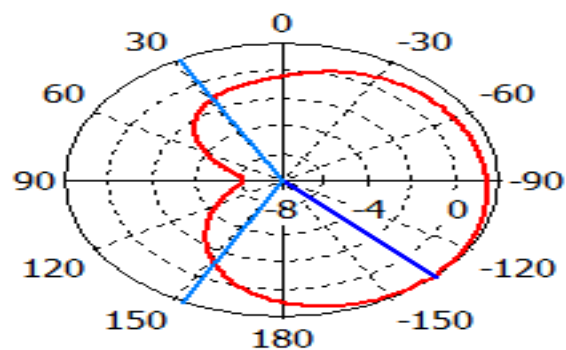

Theta / Degree vs. dB
(c) E- Plane at 6.95 GHz

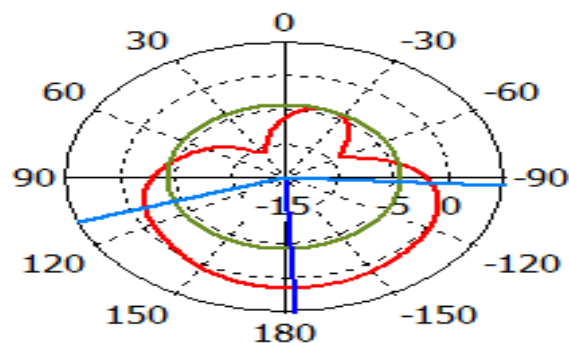

Phi / Degree vs. dB
(d) H- Plane at 6.95 GHz

Figure4. Radiation patterns of the proposed antenna at 4.5 GHz and 6.95 GHz.

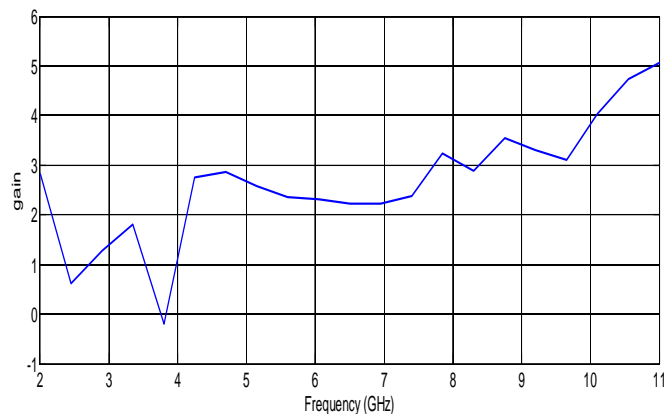


Figure5. Gain plot of the proposed antenna

**International Journal of Engineering Research in Electronics and Communication
Engineering (IJERCE)
Vol 4, Issue 3, March 2017**

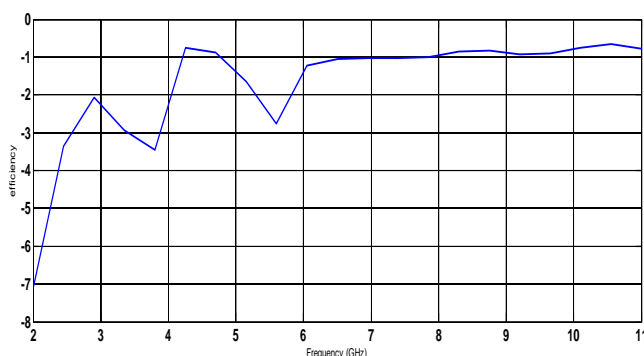


Figure6. Total efficiency plot of the proposed antenna.

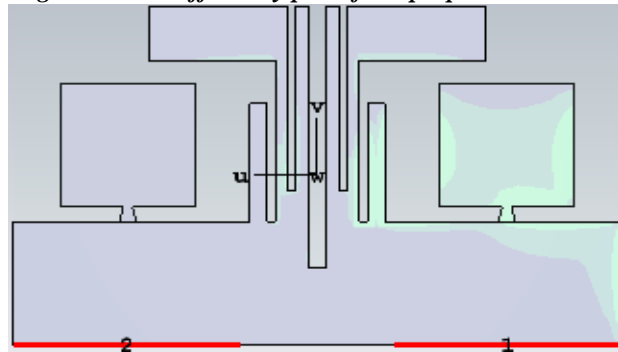


Figure7. Surface Current Distribution at 6.95GHz.

IV. CONCLUSION

An MIMO antenna with very compact size of 22×36 mm² has been designed for portable UWB applications. Two square monopole elements are used to provide UWB operation from 3.1 GHz-10.6 GHz and T-shaped stub is used to reduce the mutual coupling below -15dB. Two strips at the ground plane are used to obtain the notched band frequencies from 5.15-5.85 GHz and 2.6-3.8 GHz to suppress the interference in WLAN band and WiMAX band.

REFERENCES

[1] Li Liu, S.W. Cheung, and T.I.Yuk, "Compact MIMO Antenna for Portable UWB applications with Band-Notched Characteristic," IEEE Trans Antennas and propag., vol. 63, no.5, May. 2015.

[2] Y.Cheong, J.Lee, and J.Lee,"Quad-band monopole antenna including LTE 700 MHz with magento-dielectric material," IEEE Antennas wireless propag.

Lett., vol.11, pp.137-140, Jan. 2012.

[3] Z. Li, Z. Du, M. Takahashi, K.Saito, and K.Ito, "Reducing mutual coupling of MIMO antennas with parasitic elements for mobile terminals," IEEE Trans. Antennas propag., vol. 60, no.2, pp. 473-481, Feb.2012.

[4] S. W. Su. C. T. Lee, and F.S. chang,"printed MIMO antenna system using neutralization-line technique for wireless USB-dongle applications", IEEE Trans Antennas propag., vol. 60, no.2, pp. 456-463, Feb.2012.

[5] V. P. Tran and A. Slbille, "Spatial multiplexing in UWB MIMO communications," Electron. Lett. , vol. 42, no. 16, pp. 931-932, Aug. 3, 2006.sss

[6] S. Zhang, Z. Ying, J. Xiong, and S.He, "Ultrawideband MIMO/diversity antennas with a tree-like structure to enhance wide band isolation," IEEE Antennas wireless propag. Lett. , vol. 8, pp. 1279-1282, Nov.2009.

[7] M. Gallo et al. , "A broad band pattern diversity annular slot antenna," IEEE Trans. Antenna propag. , vol. 16, no. 3, pp. 1596-1600, Mar. 2012.

[8] L. Liu, S. W. Cheung, and T. I. Yuk, "compact MIMO antenna for portable devices in UWB applications," IEEE Trans. Antennas propag. , vol. 61, no. 8, pp. 4257-4264, Aug. 2013.

[9] Y. F. Weng, S. W cheung, and T. I. Yuk, "Compact UWB antennas with single band-notched characteristic using simple ground stubs," Microw. Opt. Technol. Lett. , vol. 53, no. 3, pp. 523-529, Jan. 2011.

[10] L. Lie, S. W. Cheung, and T. L. yuk' "Deep band-notched UWB planar monopole antenna using meander lines," Microw.Opt.Technol. Lett. , vol. 55, no. 5, pp. 1085-1091, May. 2013.

[11] Y. F. Weng, S. W. Cheung, T. I. Yuk, and L.Liu, "Creating band-notched characteristics for compact UWB monopole antennas, " in ultrawideband-currrent status and future trends, M. Matin, Ed. Rijecka, Croatia: Intech, Oct. 2012, ISBN 978-953-51-0781-1.

**International Journal of Engineering Research in Electronics and Communication
Engineering (IJERECE)
Vol 4, Issue 3, March 2017**

- [12] H. K. Yoon, Y. J. Yoon, H. Kim, and C. H. Lee, "Flexible ultra-wideband polarization diversity antenna with band-notch function", IET Microw. Antennas Propag. ,vol. 5, no. 12, pp. 1463-1470, Sep. 2011.
- [13] J. M. Lee, K. B. Kim, H. K. Ryu and J. M. woo, "A compact ultrawideband MIMO antenna with WLAN band-rejected operation for mobile devices," IEEE antennas wireless propag. , Lett. , vol. 11, pp. 990-993, Aug. 2012.
- [14] J. F. Li, Q. X. Chu, Z. H. Li, and X. X. Xia, "Compact dual band-notched UWB MIMO antenna high isolation," IEEE Trans antennas propag. , vol. 61, no. 9, pp. 4759-4766, Sep. 2013.
- [15] P. Gao et al. , "Compact printed UWB diversity slot antenna with 5.5 GHz band-notched characteristics," IEEE Antennas wireless propag. Lett. , vol. 13, pp. 376-379, Feb. 2014.
- [16] B. P. Chacko, G. Augustin, and T. A. denidni, "Uni planar polarization diversity antenna for wide band systems," IET Microw. antennas propag. Vol. 7, no. 10, pp. 851-857, Jul. 2013.