

A Literature Survey of Hexapod Robots

^[1]Dr. Sudhir Kumar Singh

^[1]Department of Mechanical Engineering, Galgotias University, Yamuna Expressway Greater Noida, Uttar Pradesh

^[1]sudhirkumar.singh@galgotiasuniversity.edu.in

Abstract: As of late, with the progress of electronic and control advancements, robots are being structured not exclusively to perform computerized errands, yet in addition to serve in different fields, for example, instruction, stimulation, cleaning, security, visit managing, and natural investigation. Among the different kinds of robots, walking robots are less steady than wheeled ones. In addition, it is likewise realized that controllers, when required to multiplex and create PWM signals for controlling servo activation, may neglect to deal with multi-hub control and other outside errands all the while. Subsequently, robots proposed for both detecting and correspondence intentions are regularly planned as wheeled robots instead of walking robots. This examination plans to build up a minimal effort walking robot that is equipped for investigating the earth in a mobile way and transmitting ecological data to the PC end through a Bluetooth module. In this investigation, a hexapod robot is structured as a test bearer and is coordinated with a solitary chip and an assortment of detecting gadgets for ecological recognition. The single chip is combined with a CPLD, which controls the incitation of servos and along these lines empowers motion of the hexapod robot. All the more especially, the single chip is combined with ultrasonic sensors, infrared sensors, a biaxial accelerometer, an electronic compass, a temperature sensor, an infrared human-body sensor, and a Bluetooth module in order to understand a moving gadget fit for walking and high-affectability detecting.

Keywords: Hexapod, Robot, Control, Software program, UI Program, Chasis, Ultrasonic Sensors.

INTRODUCTION

Robots can be found all over the place. One of the most significant piece of a robot is its undercarriage. There are a few fundamental body types: wheeled, followed and legged chassises [1]. Wheeled chassises are quick, however not reasonable for unpleasant territory. Followed chassises are slower, however increasingly reasonable to tough territory. Legged chassises are very moderate and increasingly hard to control, however incredibly vigorous in unpleasant territory. Legged chassises are fit to cross enormous gaps and can work much in the wake of losing a leg. Many looks into were acted in this field in recent years, due to its huge potential. Legged chassises are particularly perfect for space missions. There are additionally a few activities in military inquire about.

Plan to make a modest legged stage, which would permit research and testing of walking chassises. Make a system with numerous sensors that permits the case any development or conduct. The robot

ought to be driven from remotely associated PC and should send every single accessible datum from sensors, which will be shown on the PC in the UI program. This stage ought to be all inclusive, anybody could interface with the robot and drive it and anybody may associate and send his very own information to the UI program of the control PC. Some portion of the issue is the plan and usage of hexapod stride calculations, for example, tripod, and wave or swell (Fig. 2). It is additionally critical to make and program a system into the microcontroller unit (MCU) of the robot, which would have the option to perform given calculation by changing the servomotor edge at the perfect time [2]. There are a few organizations, which are creating hexapod robot models and stages. Name Lynxmotion or Trossen Robotics [3]. The two organizations offer an assortment of leisure activity and research level robot units and parts. They likewise offer a few kinds of hexapods. These robots vary in the body shape and leg development.

International Journal of Engineering Research in Computer Science and Engineering (IJERCSE)
Vol 4, Issue 6, June 2017

All robots accompany programming, which gives control of servomotors utilizing opposite kinematics and making custom strides. Robot packs are sold for about \$1,000, contingent upon the variant. Although a few arrangements as of now exist and have incredible potential, every last one of them has some impediment. The first is value, which is very high, about \$1,000 apiece. Another interruption is gear of the robots. The vast majority of the accessible robots have restricted development alternatives, such as missing foot sensors, which are hard to introduce later, or servomotor type with inadequate force or highlights. Likewise the batteries are frequently worked in the body and it is troublesome or even unimaginable to expel them.



Figure 1: Typical hexapod design

As a result of these detriments, chose to fabricate another robot (Fig. 1). This new robot is able to do similar developments like business forms and attempts to evacuate their negatives. Robot is made of aluminium profiles, due to their simple accessibility and adequate quality. In contrast to business forms, this hexapod has likewise a wide assortment of sensors and hardware, as ultrasonic sensors [4], LCD show, encoders, foot sensors or camera. All the data from the sensors are sent to the PC and showed in the UI program. It is additionally conceivable to utilize a library, which permits perusing of the considerable number of information from the robot and sending directions to it. This robot can walk utilizing tripod, wave or wave step and is additionally equipped for pivot. Every leg is outfitted with a power delicate resistor to distinguish ground and each servomotor has an

encoder to decide joint's present position. Sensors can identify interruptions to stay away from crashes. All occasions and data can be checked in Hexapod Control Room.

The main hexapods can be recognized as robots dependent on an inflexibly foreordained movement so that an adjustment to the ground was unrealistic. Early investigates during the 1950s were centered on doling out the movement control totally by a human administrator physically. One of the principal fruitful hexapod robot was built at University of Rome in 1972 (Fig.3 1) as a PC controlled walking machine with electric drives. In the center 70s, at the Russian Institute of Sciences in Moscow, a six-legged walking machine was created with a numerical model of movement control. It was furnished with a laser filtering range discoverer and was associated with a two-PC control system. In 1976, Masha hexapod walking robot was structured at Moscow State University (Fig. 3). The robot had a rounded hub body, explained legs with three DoFs.

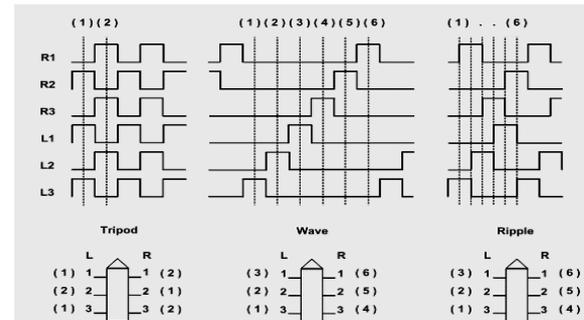


Figure 2: Walking Gaits

LITERATURE REVIEW

The hexapod had the option to arrange interruptions utilizing contact on the feet and a closeness sensor. Ohio State College in 1977 built up a six-legged insect crawly like robot system called "OSU Hexapod" [5]. This hexapod was kept fastened and was made to walk short separations over deterrents in 1983, Carnegie-Mellon University built up a "Six-Legged Hydraulic Walker", a first man-conveying hexapod fit for exploring harsh landscape utilizing various kinds of walks. The hexapod utilized a blend of hydraulic


**International Journal of Engineering Research in Computer Science and Engineering
(IJERCSE)
Vol 4, Issue 6, June 2017**

driven feedback, PC control and human control and was about 2.5 m long and a similar width. It weighted around 800 kg and was controlled by a 13 kW gas engine. In 1984, Odetic Inc., California, USA, created Odex I, a six-legged radially symmetric hexapod robot which utilized a locally available PC to play back pre-customized movements (Fig. 3). Its locally available PC could be worked remotely and the robot moved under its own capacity.


Utilizing remote human control or the pre-recorded movements, the hexapod could climb snags, for example, stairs or a pickup truck. Odex I weighed 136 kg; every leg had the option to lift 180 kg. In 1985, the "NMIIIA" Hexapod Manned Rover was created in Russia. This hexapod was intended for examining the walking propulsive gadget and control system. NMIIA had a mass of 750 kg; its heap conveying limit was 80 kg; travel speed was 0.7 km/h. In 1989, the Ohio State University begun the Adaptive Suspension Vehicle venture. The six-legged robot, appeared in Fig. 1, utilized water powered incitation being fuelled by an interior ignition engine. A human had the option to work it through a joystick while the individual control of every leg was guaranteed by a focal PC. As fundamental qualities, its 250 kg payload limit, and the likelihood to outperform 1.8 m width trench and climb vertical strides of greatest 1.65 m ought to be referenced. A hexapod walking robot named Aqua robots was built in 1989 and utilized for submerged estimations of ground profiles for the development of harbors. A little hexapod robot named Genghis with 0.35 m length and 1 kg weight was created around the same time. The conduct of Genghis was not expressly controlled, be that as it may, was worked by including layers of control top of existing less difficult layer. This methodology was extraordinary to the more conventional strategy for task decay.

Attila and Hannibal hexapod robots were worked in the Mobot Lab in the mid-1990s; they were extremely complex self-sufficient robots for their size, having more than 19 degrees of opportunity, more than 60 tangible information sources, eight microchips and continuous conduct. TUM Walking Machine was created in 1991. The robot was


structured and guided like a stick creepy crawly; the control system was acknowledged as a neural structure. "AMBLER (Autonomous Mobile Exploration Robot)" was a hexapod robot created by the Jet Propulsion Laboratory during the mid-90s for working under the specific imperatives of planetary landscape [6]. The robot was around 5 m tall, up to 7 m wide, and weighed 2500 kg. While most robots twist their legs to step and walk, Ambler's legs stay vertical, while they swing on a level plane, embracing a telescope like relocation to contact the ground.

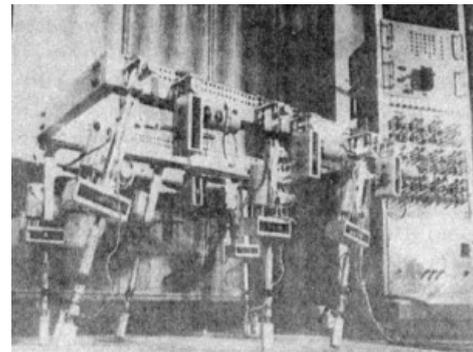

(A)

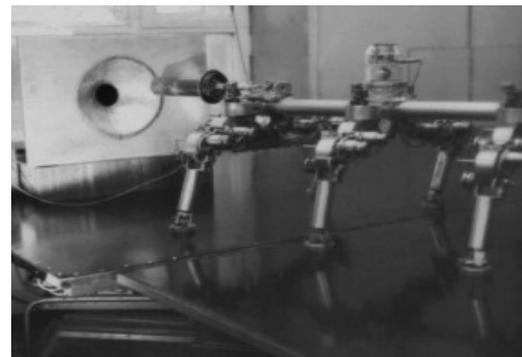

(B)

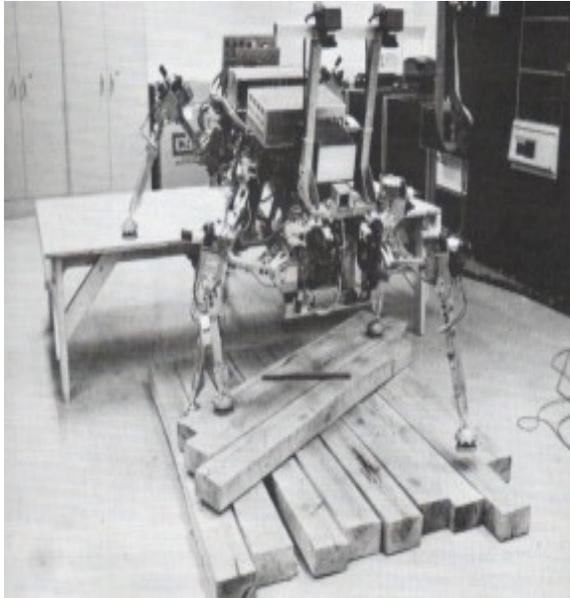

(C)



(D)



(E)

Figure 3: (A) University Of Rome's Hexapod; (B) MASHA Hexapod; (C) OSU Hexapod; (D) ODEX I Hexapod; (E) ASV Hexapod.

PRINCIPLE OF OPERATION

The exhibition of legged robots profoundly relies upon the picked stride parameters. Additionally, the change between distinctive territory types presents clashing destinations for the walk parameter decision. The outcomes displayed in appear the confinements of utilizing consistent walk parameters for moving on different surface sorts. A flexible setup of the leg output benefits in proficiency and mobility of the robot on unpleasant landscape. Interestingly, a similar leg design prompts significant expense of velocity on level landscape. Parameter adjustment regarding the qualities of the ground is proposed to improve movement on changing landscape. Parameter adjustment of legged systems is additionally appeared in for a unique biped with a tie blast and for a quadruped in with an emphasis on actualizing a neural system model in light of organic ideas. A half and half control design that empowers a legged robot to self-governing navigate lopsided landscape and to adjust the step parameters relying upon the territory qualities. The robot's independence is accomplished by utilizing visual-inertial odometer

**International Journal of Engineering Research in Computer Science and Engineering
(IJERCSE)
Vol 4, Issue 6, June 2017**

on a uniquely constructed equipment arrangement. Besides, the proposed controller is assessed on a genuine hexapod robot, Weaver. The cross breed controller presents:

- Efficient and stable velocity by adjusting stride tallness, walk recurrence and virtual firmness.
- Exteroceptive landscape discernment technique for parameter adjustment of a responsive control design.
- Increased independence by consolidating worldwide route system with controller adjustment.

WORKING

1.1 Body Construction

A hexapod robot during this venture. This hexapod has rectangular body type – it has two gatherings of legs, three on each side. Every leg has three degrees of opportunity and is fuelled by side interest servomotors HS-5485HB on coxa and tibia joints and HS-5645MG on femur joint (Fig. 4). Servomotors are furnished with encoders and leg bases are outfitted with power touchy sensors to identify ground [7]. Servomotors must be adequately ground-breaking, contingent upon the ideal conduct. In the event that tripod walk is required, at that point each engine on the center legs must be sufficiently good to hold half of the heaviness of the robot. It is imperative to pick an appropriate material for the body. It must be sufficiently strong, yet not very overwhelming. In this way aluminium profiles were picked for the body development. They are very light-weighted and strong enough. Moreover, they are accessible in different sizes and shapes and are anything but difficult to deal with. Robot is made of 25 mm and 60 mm profiles. Structure of the leg is appeared. The robot is 70 cm long, 47 cm wide and 6 cm high and weighs 4.3 kg. The cost of parts on the robot (body, servomotors, MCU) is about \$ 500, which is a large portion of the cost of the business form. Another \$80 costs Raspberry Pi, sensors and frill.

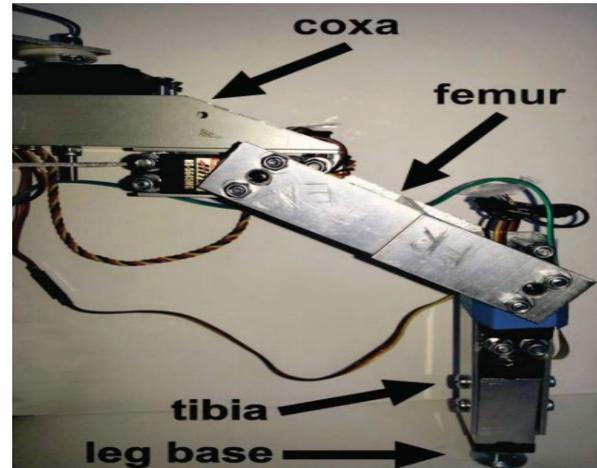


Figure 4: Leg Structure

1.2 Robot Electronic System

So as to control the robot there must be some control unit. The open-source electronic stage Arduino Mega 2560, which depends on MCU Atmega2560, was picked to drive the servomotors and sensors on this robot. Arduino board is associated with the Raspberry Pi [8] by means of USB link. The entire plan is in Fig. 5. All sensors like sensors, LCD show, memory card, GPS module or power touchy resistors are associated with Arduino. LCD show is associated by advanced pins utilizing incorporated Hitachi HD44780 driver, which permits 4- bit or 8-piece mode. The 4-piece mode requires seven I/O pins from the Arduino, while the 8-piece mode requires 11 pins. There are likewise 18 servomotors associated with computerized sticks and driven by MCU's clocks. Raspberry Pi is a smaller than usual PC the size of a credit card, to which a standard screen, a console and a mouse can be associated. It has amazingly low force utilization (max. 3.5 W) and can run Linux based working system Raspbian.

There are a few models, which contrast in RAM, the number of USB ports or GPIO pins. Raspberry Pi is outfitted with a USB Wi-Fi dongle, which is associated with a remote system, what's more, runs Qt customer program, which can discover the IP address of the server and

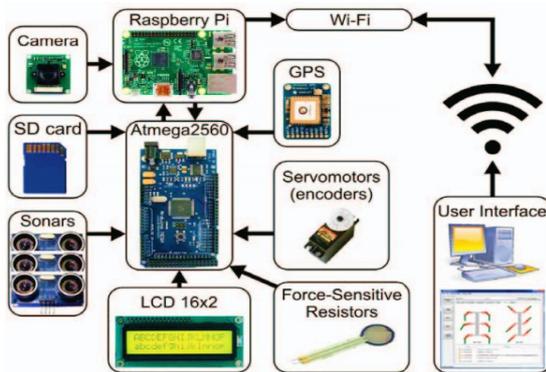


Figure 5: Electronic System of Robot

Gets associated with it. Sensor information are sent to a PC after productive association. Customer is moreover fit for reconnection after separation. All sensors and servomotors are associated and driven by Arduino board. Servomotors are constrained by MCU's clock utilizing VarSpeedServo [9] library. Robot is additionally outfitted with ultrasonic separation sensors HC-SR04 – sensors. These sensors can gauge good ways from 2 cm to 400 cm. It has 4 pins – V_{cc} , ground, trigger and reverberation.

Robot is furnished with eight sensors, three in front, and three in back and two on sides. Sensors are associated utilizing MCU's advanced pins and a multiplexer. Leg structure. From left: body is associated with the coxa utilizing coxa joint, which permits forward and in reverse revolution. Coxa is then associated with the femur and femur is associated with the tibia, which permits lifting and laying. On the off chance that the robot should stroll crosswise over rough landscape, it must be ready to identify ground. In this manner every leg is furnished with power delicate resistors, which are superior to material switches, since they can identify level of weight on the leg. This is utilized for robot adjustment. To decide the weight force sensitive resistor is associated with A/D converter utilizing voltage divider. The robot likewise has a GPS module to decide its position furthermore, a SD card to store logs and setup records. Other than of the sensors, the robot is outfitted with a two-line LCD show, which shows fundamental data about the robot, for example, battery level, the name or the chose step. Energy to the whole system is

provided by one 11.1 V Li-Po battery[10], which can supply up to 60 A. This force is adequate for all servomotors and gadgets. Yet, servomotors require 6 V power supply and gadgets require 5 V power supply. In this way, the robot is outfitted with voltage controllers. Each servomotor has its very own controller and there is one more controller for hardware. Exchanging voltage controller were utilized to diminish power utilization.

1.3 Hexapod Control Software

The product of the robot can be separated into three sections – a PC Qt UI program, a Raspberry Pi Qt program and an Arduino[11] C++ program. Information from Arduino are sent to the Raspberry Pi through a sequential port and afterward to a PC over Wi-Fi.

1.3.1 Hexapod Control Room

Hexapod[12] Control Room is UI program (Fig. 6) structured in C++ and Qt [14], which is utilized to control servomotors, strides and screen sensors of the robot. It moreover shows genuine situation of the robot legs from the top and the back view and gives direction and log windows.

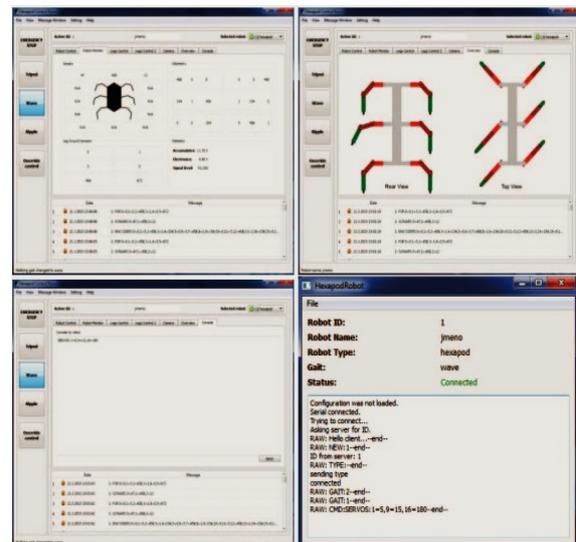


Figure 6: UI Screenshots of Hexapod Control Room

Server permits up to 10 associations. It is conceivable to switch among the associated robots. Idle robots are naturally expelled. There was likewise created Qt library for custom and outside applications. It permits to make a server, which

**International Journal of Engineering Research in Computer Science and Engineering
(IJERCSE)
Vol 4, Issue 6, June 2017**

makes association with the customer and returns the crude information from the customer. This is helpful when creating custom control application for the hexapod robot.

1.3.2. Robot Client Program

This program runs on Raspberry Pi and speaks with Hexapod Control Room and Arduino MCU. UI appeared. After the program begins, it attempts to associate with the server. The IP address is found utilizing communicate messages and customer requests another identifier. The server answers with another identifier and requests the sort or rejects association. Customer sends the sort and name in the long run. After trade of these messages the new robot is included into the server UI and the customer begins to send information from sensors, which are shown in the Hexapod Control Room. For starting association TCP attachments were utilized to forestall association disappointments, be that as it may, sensor information are sent through UDP attachments, which have better and permit constant correspondence.

1.3.3. Arduino Program

MCU on Arduino runs program, which speaks with the Raspberry Pi over USB sequential port. When approved from the Raspberry Pi, the program begins sending information from sensors over sequential port. It likewise controls all servomotors, oversees sonar estimations and gets directions from the PC. It is likewise critical to keep the fundamental program circle non-blocking. In this way singular advances are performed concurring to the schedule structure, which is like the following occasion calculation. The means are arranged and put away in the schedule structure as indicated by their beginning occasions. When playing out a step, first thing from the schedule is chosen and executed. So the non-blocking execution of the fundamental circle is accomplished, which enables different occasions to be performed. The robot is prepared by ultrasonic sensors to find obstructions around the robot. On the off chance that separation estimation is required, a short heartbeat is transmitted to the trigger pin, which causes the arrangement of a few ultrasonic waves. Waves are reflected in nature and are distinguished by the collector. Based on the time passed from sending

waves the separation can be determined. Since estimating the time utilizing Arduino's pulse in work produces delay, obstructions were utilized.

CONCLUSION

A Hexapod robot was structured, developed and tried during this venture. Robot can walk utilizing tripod, wave and swell strides and it is outfitted with ultrasonic sensors, force sensitive resistors, encoders and LCD show. Ground sensors on legs permit ground discovery, so the robot can stroll in tough territory. An Arduino Mega 2560 board was chosen as the fundamental control unit. This board is prepared by Atmega2560 microcontroller and all peripherals are associated with it. Arduino is associated by means of USB sequential port to Raspberry Pi, a small scale PC, which gives association with the control PC through Wi-Fi. There was planned UI program in C++ and Qt, which permits to control and screen robot. Program imagine legs positions, shows information from sensors and permits sending directions to robot. It likewise enables the client to make custom walk, which can be either tried on the robot or reproduced in the UI. Association with control program is programmed. Performed tests appear, that the robot is prepared to do very exact development, even in tough territory.

The cost of segments on the robot (body, servomotors, MCU) is about \$ 500. Another \$ 80 cost Raspberry Pi, sensors furthermore, embellishments. In our future work it needs to include in the examination of controlling hexapod robot utilizing development procedures like focal example generators.

REFERENCES

- [1] D. Acemoglu and P. Restrepo, "Robots and Jobs: Evidence from US Labor Markets," *SSRN Electron. J.*, 2017.
- [2] N. Sakimura *et al.*, "10.5 A 90nm 20MHz fully nonvolatile microcontroller for standby-power-critical applications," in *Digest of Technical Papers - IEEE International Solid-State Circuits Conference*, 2014.

**International Journal of Engineering Research in Computer Science and Engineering
(IJERCSE)
Vol 4, Issue 6, June 2017**

- [3] I. Ben Abdallah, Y. Bouteraa, and C. Rekik, "Kinect-Based Sliding Mode Control for Lynxmotion Robotic Arm," *Adv. Human-Computer Interact.*, 2016.
- [4] L. Kleeman, "Ultrasonic sensors," in *Control and Mechatronics*, 2016.
- [5] K. Aparna and S. Geeta, "Six Legged Locomotion on Uneven Terrain," *Int. J. Eng. Sci. Innov. Technol.*, vol. 1, no. 1, 2012.
- [6] Y. H. Lee *et al.*, "A gait transition algorithm based on hybrid walking gait for a quadruped walking robot," *Intell. Serv. Robot.*, vol. 8, no. 4, pp. 185–200, 2015.
- [7] C. J. Dallmann, V. Dürr, and J. Schmitz, "Joint torques in a freely walking insect reveal distinct functions of leg joints in propulsion and posture control," *Proc. R. Soc. B Biol. Sci.*, 2016.
- [8] J. Newmarch and J. Newmarch, "Raspberry Pi," in *Linux Sound Programming*, 2017.
- [9] netlabtoolkit, "VarSpeedServo," *GitHub*, 2017. .
- [10] J. B. Goodenough and K. S. Park, "The Lion rechargeable battery: A perspective," *Journal of the American Chemical Society*. 2013.
- [11] Arduino, "Arduino Uno Rev3," *Store.Arduino.Cc*, 2018. .
- [12] F. Tedeschi and G. Carbone, "Design issues for hexapod walking robotsdesign issues for hexapod walking robots," *Robotics*, 2014.
- [13] Ritika Wason, Vishal Jain, Gagandeep Singh Narula, Anupam Balyan and Mandeep Kaur, "Smart Robotics for Smart Healthcare", *Advances in Robotics & Mechanical Engineering (ARME)*, Volume 1, Issue 5, January, 2019, DOI: ARME.MS.ID.000121.
- [14] Ritika Wason, Vishal Jain, Gagandeep Singh Narula, Anupam Balyan, "Deep Understanding of 3-D Multimedia Information Retrieval on Social Media: Implications and Challenges", *Iran Journal of Computer Science*, ISSN: 2520-8438 (Print) 2520-8446 (Online).
- [15] P.Andrew, J.Anish Kumar, R.Santhya, Prof.S.Balamurugan, S.Charanyaa, "Investigations on Evolution of Strategies to Preserve Privacy of Moving Data Objects" *International Journal of Innovative Research in Computer and Communication Engineering*, 2(2): 3033-3040, 2014.
- [16] P.Andrew, J.Anish Kumar, R.Santhya, Prof.S.Balamurugan, S.Charanyaa, "Certain Investigations on Securing Moving Data Objects" *International Journal of Innovative Research in Computer and Communication Engineering*, 2(2): 3033-3040, 2014

**International Journal of Engineering Research in Computer Science and Engineering
(IJERCSE)**
Vol 4, Issue 6, June 2017
